


DS-KH8350-WTE1 KH8 Series Indoor Station

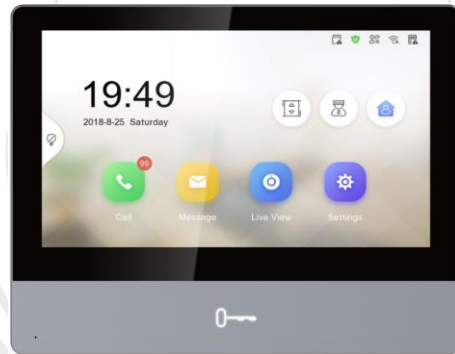

- 7-inch IPS touch screen with 1024 × 600 resolution
- Reddot award winner
- Convenient Hik-Connect APP Mobile Control
- Receive calls, open the door and live view remotely
- Easy to use without PC
- Easy wizard for quick set up
- Configure the whole system on one touch screen
- Rich functions and extensions
- Live-view of the door station and cameras in public areas
- Support voice messages when no response from the indoor station
- Receive alarms by internal alarm terminals
- Elevator access control

▪ Specification

System parameters	
Operation system	Linux
ROM	32 MB
RAM	128 MB
Processor	Embedded high performance processor
Display parameters	
Screen size	7-inch
Operation method	Capacitive touch screen
Type	Colorful IPS
Resolution	1024 × 600
Video parameters	
Lens	/
Resolution	/
FOV	/
Wide dynamic range (WDR)	/
Video compression standard	/
Focal length	/
Audio parameters	
Audio input	1 built-in omnidirectional microphone
Audio compression standard	G.711U/G.711A
Audio output	1 built-in loudspeaker
Audio Input	Built-in omnidirectional microphone
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Notice capacity	200
Linked indoor extensions capacity	16
Linked doorphone capacity	17
Linked network camera capacity	16
Network parameters	
Network protocol	TCP/IP, SIP, RTSP
Wi-Fi	2.4 GHz, IEEE802.11b, IEEE802.11g, IEEE802.11n
Bluetooth	/
3G/4G	/
Zigbee	/
Device interfaces	
Alarm input	8
Network interface	1 RJ-45 10/100 Mbps self-adaptive
TAMPER	/
RS-485	1 RS-485 (Half duplex)
USB	/
TF card	Support TF card, up to 128 G

No. 333 Qianmo Road, Binjiang District,
Hangzhou 31001, China
T: +86-571-8817-5988
www.hikvision.com

Follow us on social media to get the latest product and solution information.

Hikvision
 HikvisionHQ
 HikvisionHQ
 Hikvision_Global
 Hikvision Corporate Channel
 hikvisionhq

Alarm output	2
Lock control	2 high/low level relays (3.3V/0V)
General	
Button	1 physical button
Installation	Surface mounting
Indicator	/
Weight	Net weight: 355 g (0.8 lb) Gross weight: 899 g (2.0 lb)
Protective level	/
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	180 mm × 140 mm × 22.4 mm (7.09" × 5.51" × 0.88")
Battery	/
Power supply	12 VDC, 1 A, IEEE802.3af, standard PoE
Application environment	Indoor
Power consumption	≤ 8 W
Language	English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese (Brazil), Spanish, Hebrew, Romanian, Turkish, Estonian, Danish, Swedish, Norwegian, Finnish, Vietnamese, Croatian, Slovenian, Serbian, Arabic, Portuguese (Portugal), Lithuanian, Uzbek, Kazakh, Mongolian, Ukrainian

▪ Available Model

DS-KH8350-WTE1

Headquarters


No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



▪ **Dimension**

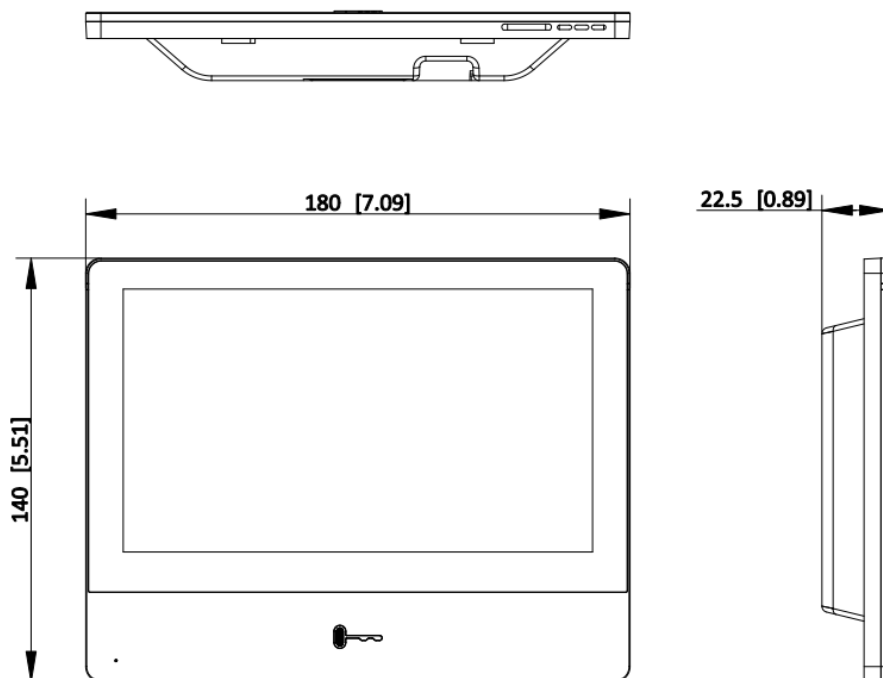


Unit:mm [inch]

SCALE 1:1

▪ **Accessory**

▪ **Optional**

DS-KAW50-1 50W 12V Power Adapter	DS-KABH8350-T Indoor Station Table Bracket	DS-KAW50-1N 50W 12V Power Adapter
		

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

