

The PB5000 series is a heavy fence barrier gate. The unique double chassis and double crank link structure looks strong and reliable. Multi-style fence boom has better blocking effect. It is suitable for government agencies, business buildings, factories, resort hotels, schools and upscale apartment complexes.

## **Features**


- The opening speed is 6s to 9s, and the speed can be adjustable according to the boom arm length.
- Adopt double support frame plate and double crank link mechanism to working more stable and more pressure-resistant.
- Adopt integrated high power AC variable frequency motor and worm gear reducer structure, the transmission is more powerful and more wear-resistant, it can still running stably in strong wind speed environment.
- Support maximum boom arm length of 6m.
- When the boom arm is blocked during the fall, it returns to the rising state.
- Support connection the loop detector, photocell detector, radar detector achieve anti-smash and auto closing function.
- Support delay automatic closing function.

## **Specifications**

Model	PB5000 series	
Boom arm type	Fence	
Boom arm length	1m ≤ L ≤ 3m	$3.5m \le L \le 6m$
Opening	бs	9s
Operating voltage	AC 220V/110V 50/60Hz	
Motor power	140~250W	
Operating temperature range	-35 ~ +85°C	
Chassis size	437 * 460 * 1355mm	
Chassis weight	110kg	
Boom arm center height above ground	1130mm	
Remote distance	≤30m	

## **Dimensions (mm)**



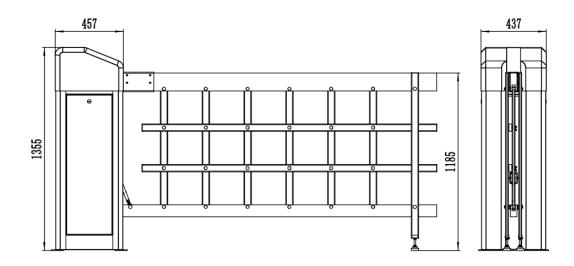

## **Case showing**



